

Double Sided Thread Turning Inserts



A unique line of 2 sided inserts including 6 cutting edges, a cost saving tool.

Advantages of DSI-Thread Turning Inserts

- Increased productivity thanks to the six cutting edges.
- U Style inserts for a wide range of full or partial profile standard threads.
- Same insert for right hand or left hand thread.
- Saving on tooling costs.
- Unique anti-vibration anvil design for clamping the insert and supporting the cutting edge.
- Simple insert's mounting and cutting edge indexing.
- Heavy duty toolholders designed specially for this line.


Contents:

Page:


| | |
|--------------------------------------|----|
| Product Identification | 60 |
| Partial Profile 60° | 61 |
| Partial Profile 55° | 61 |
| ISO | 62 |
| UN | 62 |
| WHITWORTH 55° | 63 |
| NPT | 63 |
| Thread Turning Toolholder - External | 64 |
| Thread Turning Toolholder - Internal | 64 |

Product Identification

DSI Ordering Code

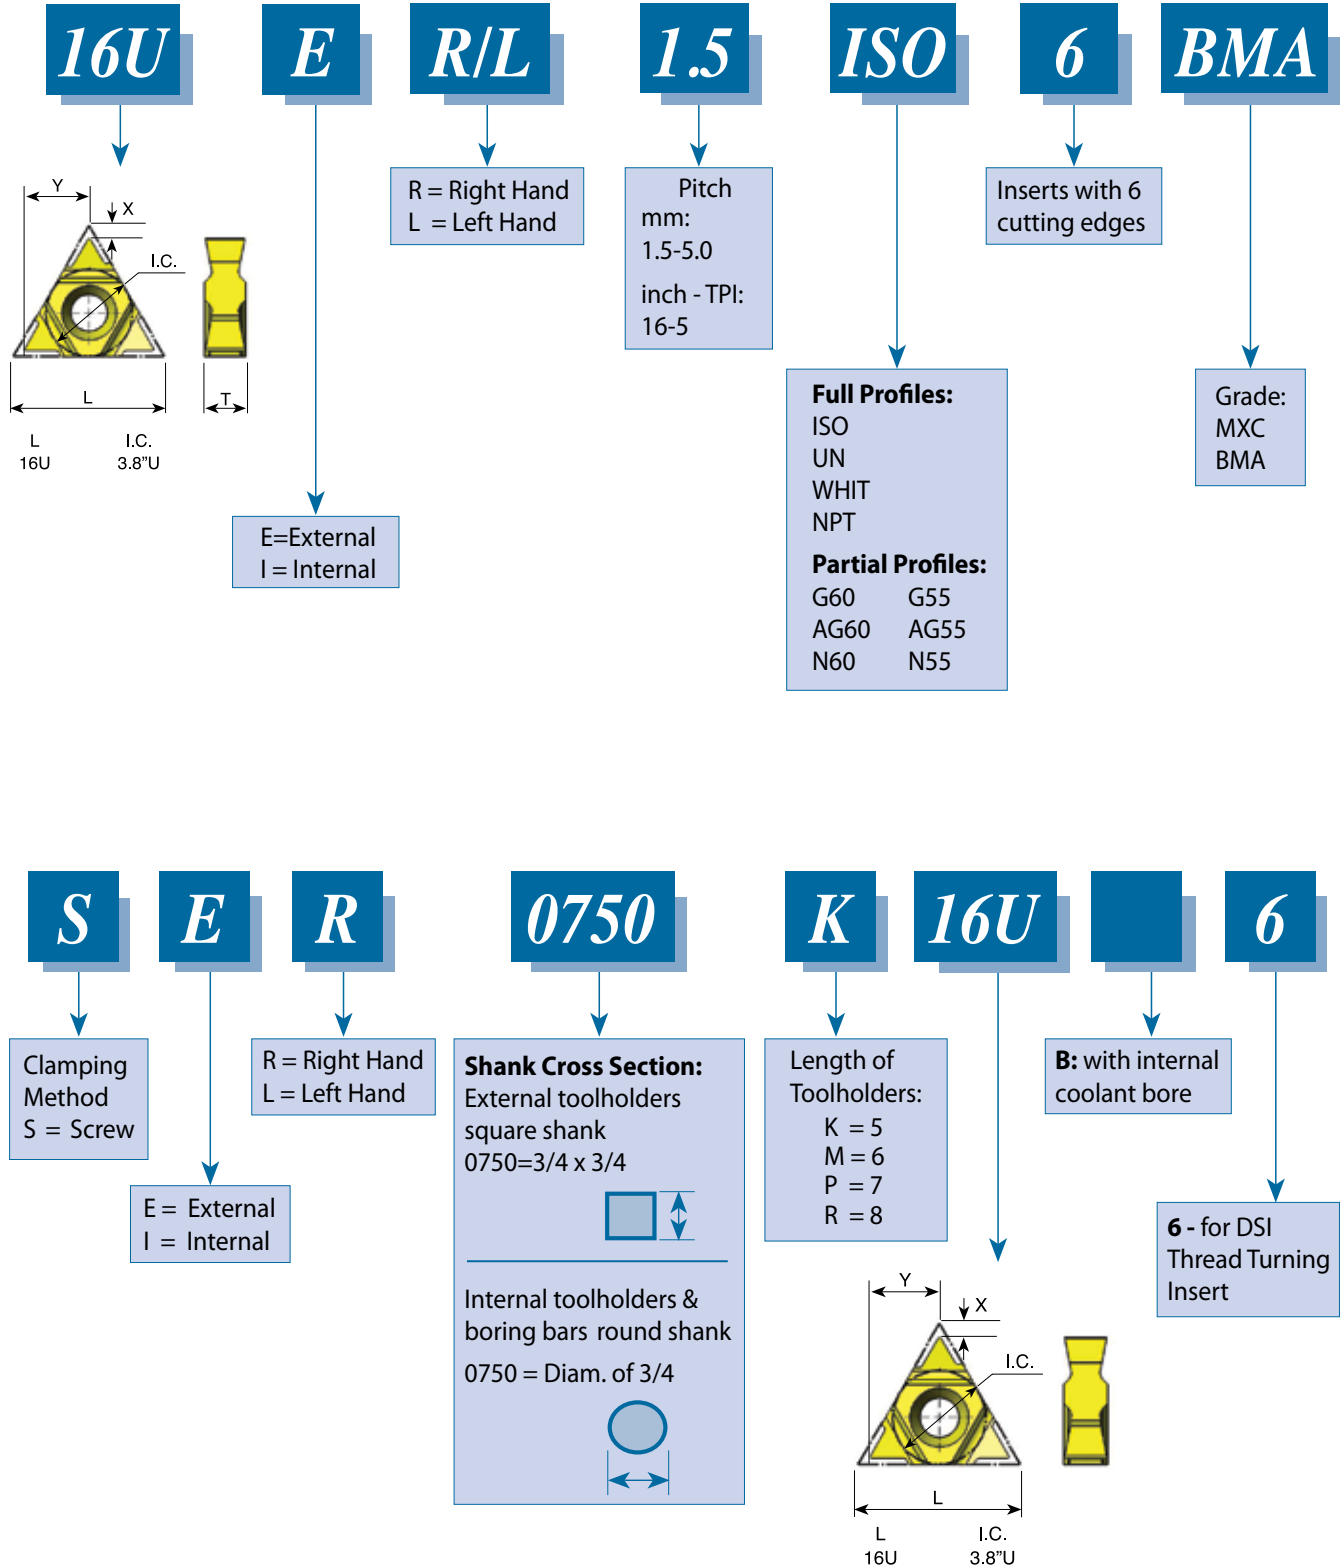


Partial Profile 60°



| Pitch Range mm | Pitch Range TPI | L mm | I.C. | EXTERNAL Ordering Code | INTERNAL Ordering Code | X | Y | T |
|----------------|-----------------|------|------|----------------------------------|----------------------------------|-----|-----|-----|
| 1.75 - 3.0 | 14-8 | 16U | 3/8U | 16U ER/L G60-6 | 16U IR/L G60-6 | .06 | .28 | .18 |
| 0.5 - 3.0 | 48-8 | 16U | 3/8U | 16U ER/L AG60-6 | 16U IR/L AG60-6 | .06 | .28 | .18 |
| 3.5 - 5.0 | 7-5 | 16U | 3/8U | 16U ER/L N60-6 | 16U IR/L N60-6 | .05 | .29 | .18 |

Available coating grades: BMA or MXC

Partial Profile 55°




| Pitch Range mm | Pitch Range TPI | L mm | I.C. | EXTERNAL Ordering Code | INTERNAL Ordering Code | X | Y | T |
|----------------|-----------------|------|------|----------------------------------|----------------------------------|-----|-----|-----|
| 1.75 - 3.0 | 14-8 | 16U | 3/8U | 16U ER/L G55-6 | 16U IR/L G55-6 | .06 | .28 | .18 |
| 0.5 - 3.0 | 48-8 | 16U | 3/8U | 16U ER/L AG55-6 | 16U IR/L AG55-6 | .06 | .28 | .18 |
| 3.5 - 5.0 | 7-5 | 16U | 3/8U | 16U ER/L N55-6 | 16U IR/L N55-6 | .05 | .29 | .18 |

Available coating grades: BMA or MXC

For Carbide Grade and Cutting Speed see page 66-67


ISO

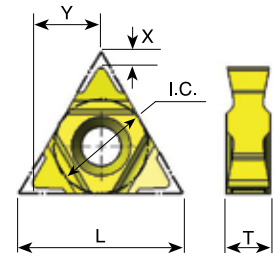

| Pitch mm | L mm | I.C. | EXTERNAL Ordering Code | INTERNAL Ordering Code | X | Y | T |
|----------|------|------|----------------------------------|----------------------------------|-----|-----|-----|
| 1.5 | 16U | 3/8U | 16U ER/L 1.5 ISO-6 | 16U IR/L 1.5 ISO-6 | .06 | .27 | .18 |
| 1.75 | 16U | 3/8U | 16U ER/L 1.75 ISO-6 | 16U IR/L 1.75 ISO-6 | .06 | .27 | .18 |
| 2.0 | 16U | 3/8U | 16U ER/L 2.0 ISO-6 | 16U IR/L 2.0 ISO-6 | .06 | .27 | .18 |
| 2.5 | 16U | 3/8U | 16U ER/L 2.5 ISO-6 | 16U IR/L 2.5 ISO-6 | .06 | .27 | .18 |
| 3.0 | 16U | 3/8U | 16U ER/L 3.0 ISO-6 | 16U IR/L 3.0 ISO-6 | .06 | .27 | .18 |
| 3.5 | 16U | 3/8U | 16U ER/L 3.5 ISO-6 | 16U IR/L 3.5 ISO-6 | .06 | .27 | .18 |
| 4.0 | 16U | 3/8U | 16U ER/L 4.0 ISO-6 | 16U IR/L 4.0 ISO-6 | .06 | .27 | .18 |
| 4.5 | 16U | 3/8U | 16U ER/L 4.5 ISO-6 | 16U IR/L 4.5 ISO-6 | .06 | .27 | .18 |
| 5.0 | 16U | 3/8U | 16U ER/L 5.0 ISO-6 | 16U IR/L 5.0 ISO-6 | .06 | .27 | .18 |

Available coating grades: BMA or MXC

UN - Unified **UNC, UNF, UNEF, UNS**

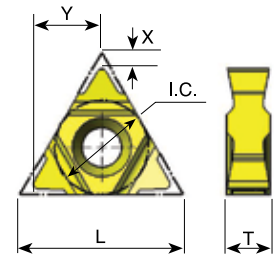


| Pitch TPI | L mm | I.C. | EXTERNAL Ordering Code | INTERNAL Ordering Code | X | Y | T |
|-----------|------|------|----------------------------------|----------------------------------|-----|-----|-----|
| 16 | 16U | 3/8U | 16U ER/L 16 UN-6 | 16U IR/L 16 UN-6 | .06 | .27 | .18 |
| 14 | 16U | 3/8U | 16U ER/L 14 UN-6 | 16U IR/L 14 UN-6 | .06 | .27 | .18 |
| 13 | 16U | 3/8U | 16U ER/L 13 UN-6 | 16U IR/L 13 UN-6 | .06 | .27 | .18 |
| 12 | 16U | 3/8U | 16U ER/L 12 UN-6 | 16U IR/L 12 UN-6 | .06 | .27 | .18 |
| 11.5 | 16U | 3/8U | 16U ER/L 11.5 UN-6 | 16U IR/L 11.5 UN-6 | .06 | .27 | .18 |
| 11 | 16U | 3/8U | 16U ER/L 11 UN-6 | 16U IR/L 11 UN-6 | .06 | .27 | .18 |
| 10 | 16U | 3/8U | 16U ER/L 10 UN-6 | 16U IR/L 10 UN-6 | .06 | .27 | .18 |
| 9 | 16U | 3/8U | 16U ER/L 9 UN-6 | 16U IR/L 9 UN-6 | .06 | .27 | .18 |
| 8 | 16U | 3/8U | 16U ER/L 8 UN-6 | 16U IR/L 8 UN-6 | .06 | .27 | .18 |
| 7 | 16U | 3/8U | 16U ER/L 7 UN-6 | 16U IR/L 7 UN-6 | .06 | .27 | .18 |
| 6 | 16U | 3/8U | 16U ER/L 6 UN-6 | 16U IR/L 6 UN-6 | .06 | .27 | .18 |
| 5 | 16U | 3/8U | 16U ER/L 5 UN-6 | 16U IR/L 5 UN-6 | .06 | .27 | .18 |

Available coating grades: BMA or MXC

For Carbide Grade and Cutting Speed see page 66-67


Whitworth 55° BSW, BSF, BSP, BSB



| Pitch TPI | L mm | I.C. | EXTERNAL Ordering Code | INTERNAL Ordering Code | X | Y | T |
|--------------|---------|------|----------------------------------|----------------------------------|-----|-----|-----|
| 16 | 16U | 3/8U | 16U ER/L 16 W-6 | 16U IR/L 16 W-6 | .06 | .27 | .18 |
| 14 | 16U | 3/8U | 16U ER/L 14 W-6 | 16U IR/L 14 W-6 | .06 | .27 | .18 |
| 12 | 16U | 3/8U | 16U ER/L 12 W-6 | 16U IR/L 12 W-6 | .06 | .27 | .18 |
| 11 | 16U | 3/8U | 16U ER/L 11 W-6 | 16U IR/L 11 W-6 | .06 | .27 | .18 |
| 10 | 16U | 3/8U | 16U ER/L 10 W-6 | 16U IR/L 10 W-6 | .06 | .27 | .18 |
| 9 | 16U | 3/8U | 16U ER/L 9 W-6 | 16U IR/L 9 W-6 | .06 | .27 | .18 |
| 8 | 16U | 3/8U | 16U ER/L 8 W-6 | 16U IR/L 8 W-6 | .06 | .27 | .18 |
| 7 | 16U | 3/8U | 16U ER/L 7 W-6 | 16U IR/L 7 W-6 | .06 | .27 | .18 |
| 6 | 16U | 3/8U | 16U ER/L 6 W-6 | 16U IR/L 6 W-6 | .06 | .27 | .18 |
| 5 | 16U | 3/8U | 16U ER/L 5 W-6 | 16U IR/L 5 W-6 | .06 | .27 | .18 |

Available coating grades: BMA or MXC

NPT

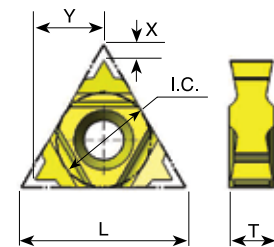


| Pitch TPI | L mm | I.C. | EXTERNAL Ordering Code | INTERNAL Ordering Code | X | Y | T |
|--------------|---------|------|----------------------------------|----------------------------------|-----|-----|-----|
| 14 | 16U | 3/8U | 16U ER/L 14 NPT-6 | 16U IR/L 14 NPT-6 | .06 | .27 | .18 |
| 11.5 | 16U | 3/8U | 16U ER/L 11.5 NPT-6 | 16U IR/L 11.5 NPT-6 | .06 | .27 | .18 |
| 8 | 16U | 3/8U | 16U ER/L 8 NPT-6 | 16U IR/L 8 NPT-6 | .06 | .27 | .18 |

Available coating grades: BMA or MXC
For Carbide Grade and Cutting Speed see page 66-67

Heavy Duty Thread Turning Toolholders


External

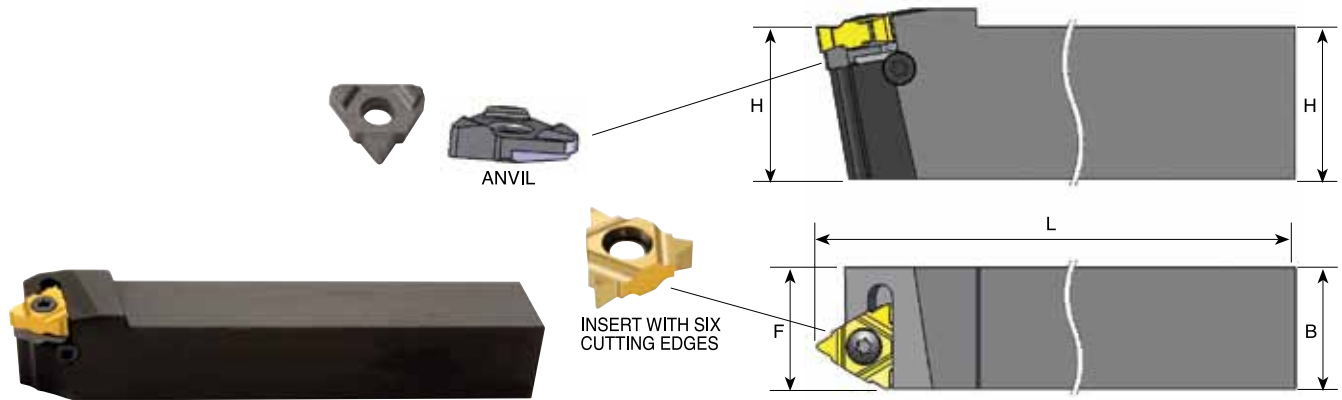

| Ordering Code Right Hand | H | B | L | F | Insert Screw | Anvil Screw | Torx Key | RH Anvil | LH Anvil |
|-----------------------------|------|------|---|------|-----------------|----------------|-------------|-------------|-------------|
| SER 0750 K16U-6 | 0.75 | 0.75 | 5 | 0.75 | S16 | A16 | K16 | AER 16U-6 | AEL 16U-6 |
| SER 1079 M16U-6 | 1.0 | 0.79 | 6 | 0.79 | S16 | A16 | K16 | AER 16U-6 | AEL 16U-6 |

For **LEFT HAND** toolholders specify **SEL** instead of **SER**

Internal with Coolant Bore

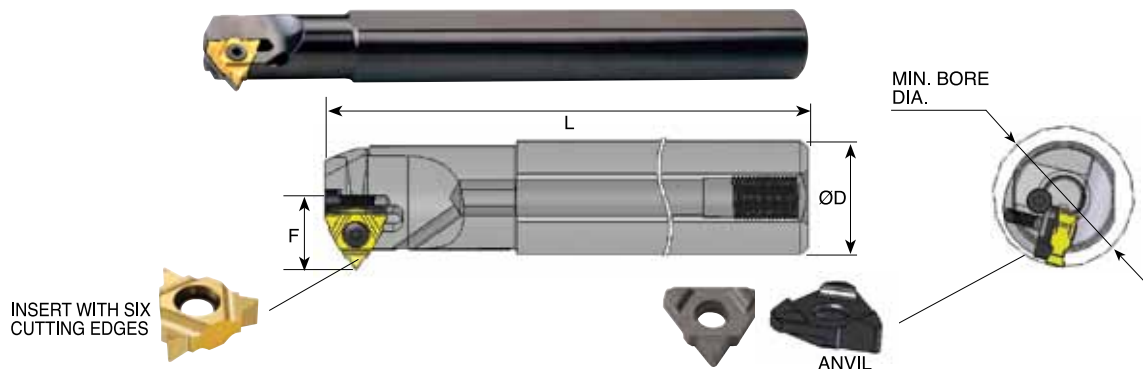

| Ordering Code Right Hand | ØD | Min. bore dia. | L | F | Insert Screw | Anvil Screw | Torx Key | RH Anvil | LH Anvil |
|-----------------------------|------|-------------------|---|------|-----------------|----------------|-------------|-------------|-------------|
| SIR 0750 P16UB-6 | 0.75 | 0.94 | 7 | 0.57 | S16 | A16 | K16 | AIR 16U-6 | AIL 16U-6 |
| SIR 1000 R16UB-6 | 1.0 | 1.14 | 8 | 0.69 | S16 | A16 | K16 | AIR 16U-6 | AIL 16U-6 |

For **LEFT HAND** toolholders specify **SIL** instead of **SIR**